

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, DC 20037-3213
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860

PC511 U.S. PTO
09/192303
11/17/98

11/17/98
CALIFORNIA OFFICE
1601 EL CAMINO REAL
SUNLAND PARK, CA 94025
TELEPHONE (650) 325-5800
FACSIMILE (650) 325-6606

November 17, 1998

JAPAN OFFICE
TOEI NISHI SHIMBASHI BLDG. 4F
13-5 NISHI SHIMBASHI 1-CHOME
MINATO-KU, TOKYO 105, JAPAN
TELEPHONE (03) 3503-3760
FACSIMILE (03) 3503-3756

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Manabu DEGUCHI
PORTABLE COMMUNICATION APPARATUS
Our Ref. Q052327

Dear Sir:

Attached hereto is the application identified above including 22 sheets of the specification, claims, 8 sheets of informal drawings, and executed Declaration and Power of Attorney. The Assignment will be filed at a later date.

The Government filing fee is calculated as follows:

Total claims	13 - 20	=		x	\$18.00	=	
Independent claims	3 - 3	=		x	\$78.00	=	
Base Fee							\$760.00

TOTAL FILING FEE

\$760.00

A check for the statutory filing fee of \$760.00 is attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from November 17, 1997 based on Japanese Application No. 332417/97. The priority document will be filed at a later date.

Respectfully submitted,
SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
Attorneys for Applicant

By: J. Frank Osha
J. Frank Osha
Reg. No. 24,625

PORTABLE COMMUNICATION APPARATUS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a portable communication apparatus such as a portable telephone or the like, and relates, more particularly, to a portable communication apparatus having a function for displaying options to be selected on a display.

2. Description of Related Art

There have been proposed portable telephones having a selection means for selecting a desired one from various information items displayed on a display such as a liquid-crystal display or the like.

For example, a compact portable radio telephone apparatus disclosed in Japanese Patent Application Laid-open Publication No. 4-29426 is provided with a scroll key for scrolling information on screen and ENTER keys disposed at positions corresponding to displayed options, respectively. And a user can select a necessary option from the displayed options by depressing the corresponding ENTER key.

Further, a portable telephone disclosed in Japanese Patent Application Laid-open Publication No. 6-338931 is provided with a table in which dial numbers are registered and the user can

FQ5-348

2

select a registered dial number to display it on screen by depressing keys on a keypad that is changed into an abbreviated dialing mode. Thereafter, the user can make a call according to the selected dial number by depressing a calling key.

5 However, according to the above-described conventional telephone apparatuses, key operation is complex and a dialing procedure is cumbersome particularly in the case of dialing numbers used frequently. Thus, it has been necessary for the user to depress keys by moving fingers repeatedly. In the case
10 of the above-described apparatus using the scroll key and ENTER keys to select a desired option, it is necessary to select it by moving a finger to the corresponding ENTER button each time the desired option is displayed by scrolling. The reason is that the ENTER buttons are disposed at preset positions under the
15 display screen.

Further, according to the other method of selecting a registered number by changing the key operation into an abbreviated dialing mode, it is not only necessary to change the key operation into the abbreviated dialing mode but also to search
20 for a desired telephone number through key operation in the abbreviated dialing mode. Further, a calling key operation is additionally required for dialing.

SUMMARY OF THE INVENTION

03 3288 3222

FQ5-348

3

It is an object of the present invention to provide a portable communication apparatus that enables a user to select a desired one from information items displayed on a display by simplified key operation.

5 It is another object of the present invention to provide a portable communication apparatus that enables a user to easily select a desired dial number and to make a call in a simple manner.

According to an aspect of the present invention, a portable communication apparatus has a display and a keypad on a main side
10 of a housing thereof, wherein the keypad includes a key section comprising at least one key which is used to select a desired information item from a plurality of information items displayed in the display and then to execute a selected information item. Since selection and execution of a desired information item can
15 be performed by the key section only, the operability of selection and execution is improved.

According to another aspect of the invention, a portable communication apparatus has a display and a keypad on a main side of a housing thereof, the keypad comprising two key sections which
20 are separately provided on the main side, wherein a predetermined one of the two key sections comprises a plurality of key contacts which are used to select a desired information item from a plurality of information items displayed in the display and then to execute a selected information item.

25 Since selection and execution of a desired information item can be performed by the predetermined key section only, the

FQ5-348

4

operability of selection and execution is improved. Further, since the predetermined key section is disposed with a space from the other key section, the keypad operability is further improved.

5 Further, according to still another aspect of the invention, a portable communication apparatus has a display and a keypad on a main side of a housing thereof, the keypad comprising a first key section and a second key section which are separately provided on the main side, wherein the first key section comprises a
10 plurality of key contacts which are used to select a desired information item from a plurality of information items displayed in the display and then to execute a selected information item; and the second key section comprises a ten-key pad. The portable communication apparatus further comprises a memory for storing
15 a plurality of names and destination addresses corresponding to the names and a controller for selecting a desired name and a destination address corresponding to the desired name and executing a calling operation according to the destination address of the desired name according to a series of operations
20 of the first key section.

Since selection and execution of a calling operation according to the desired destination address are performed in the first key section within the keypad, the calling operation is facilitated.

FQ5-348

5

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view for showing an appearance of a portable telephone as a first embodiment of a portable communication apparatus according to the present invention;

5 Fig. 2 is a schematic block diagram for showing an internal circuit structure of the present embodiment;

Fig. 3 is a flowchart for showing one example of a calling operation in the present embodiment;

10 Figs. 4A-4E are views for showing examples of display corresponding to the calling operation as shown in Fig. 3;

Fig. 5 is a flowchart for showing one example of a menu display operation in the present embodiment;

Figs. 6A- 6B are views for showing examples of display corresponding to the menu display operation;

15 Fig. 7 is a perspective view for showing an appearance of a portable telephone as a second embodiment of a portable communication apparatus according to the present invention;

Fig. 8A is a cross-sectional view showing the inner

FQ5-348

6

structure of a lever switch used in the second embodiment as shown in Fig. 7; and

Fig. 8B is a plan view showing an arrangement of switch contacts in the lever switch as shown in Fig. 8A.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Fig. 1, a main body 100 of the portable telephone is provided with a display 101 such as a liquid crystal display (LCD) and a keypad 102 having a layout of various keys. The display 101 and the keypad 102 are provided in a main surface
10 of a housing of the main body 100.

The keypad 102 is comprised of a first part and a second part. The first part consists of arrow keys 103 and an Enter key 104 and a second part consists of a menu key 105 and other keys including a ten-key pad. A speaker 106 is disposed as a
15 telephone receiver at an upper portion of the main body 100 and a microphone 107 is disposed as a telephone transmitter at a lower portion of the main body 100. Further, an antenna 108 is provided on the upper surface of the main body 100 and a battery pack 109 is detachably provided on the rear surface of the main body 100.

20 In the first part of the keypad 102, four arrow keys 103 corresponding to up, down, left and right directions are disposed to surround the Enter key 104. In the main body 100, a center

key contact corresponding to the Enter key 104 and four key contacts corresponding to the four arrow keys 103 are provided with the center key contact surrounded by the four key contacts. By selectively depressing the arrow keys 103, a highlight bar displayed in the display 101 can be moved horizontally and vertically on the screen, that is, in up, down, left and right directions, as described later. An information item positioned by the highlight bar is selected and executed by pressing the Enter key 104. For example, a calling is made or a menu item is carried out. The Enter key 104 can also function as a normal calling key.

A user moves the highlight bar to a desired information item displayed on the display 101 by selectively operating the up, down, left and right arrow keys 103, with a thumb, for example. When the Enter key 104 at the center is depressed with the same thumb immediately after the highlight bar has reached the desired information item, an operation corresponding to the desired information item can be executed. In other words, it is possible to carry out the necessary operation by just placing the finger at the first part of the keypad 102 without moving the finger to a long distance.

Although the four arrow keys 103 are used to move the highlight bar on the display 101 in the four directions of up, down, left and right directions in this case, it is also possible
25 to provide only two arrow keys to move the highlight bar in only two directions of left and right or up and down directions. The

number of the arrow keys 103 can be determined according to the volume of information that can be displayed in the display 101 of the telephone. For example, if the display 101 can display only about one to three names of destinations in a telephone directory function, only two arrow keys 103 are sufficient to search for a desired telephone number in two directions.

Further, according to the present embodiment, a spacing between the first part and the second part of the keypad 102 causes movement and enter operations by the arrow keys 103 and Enter key 104 of the first part to be made easier. It is also possible to form the first part and the second part within one area of the keypad 102 so long as the easiness of operation is not lost. It is needless to mention that even in this case the arrow keys 103 and the Enter key 104 are disposed close to each other as the first part.

Referring to Fig. 2, inside the main body 100 of the portable telephone, there are built a transceiver 201, a channel controller 202, a speech processor 203 and a microprocessor (CPU) 204 which provide a radio telephone function. The antenna 108 is connected to the transceiver 201, and the microphone 107 and the speaker 106 as a telephone transmitter and a telephone receiver respectively are connected to the speech processor 203. The LCD display 101 is connected to an LCD controller 205 which is controlled by the microprocessor 204, and various kinds of key operation signals of the keypad 102 are input to the microprocessor 204 through an input controller 206. In the

present embodiment, there is provided a directory memory 207 storing registered names and telephone numbers of persons to communicate with, and these names and telephone numbers are read and written under the control of the microprocessor 204. The operation of the present embodiment will be explained in detail with reference to examples shown in Figs. 3 to 6.

Referring to Fig. 3 and Figs. 4A-4E, it is assumed that the Enter key 104 also has a function of a normal calling function, that is, registered names or a set of registered names and telephone numbers are displayed on the display 101 by operating the Enter key 104.

At first, when the microprocessor 204 is in a waiting status (YES at step S301) and also when a key operation is not carried out (NO at step S302), date and time information as shown in Fig. 4A is being displayed in the display 101.

When the Enter key 104 is depressed in this waiting status (YES at step S302), the microprocessor 204 reads out data from the directory memory 207 (step S303) and displays a plurality of names arranged in an alphabetical order, with the highlight bar at an initial position, in the display 101 (step S304).

For example, names starting from 'A' (Japanese alphabet) are displayed in the left column of the display 101: Ando, Ikeda, Itoh, Ueno, Okada, and so on. Names starting from 'Ka' (Japanese alphabet) are displayed in the middle column: Kudoh and Koike. Names starting from 'Sa' (Japanese alphabet) are displayed in the right column: Sasaki, Sakai, Satoh, Shimada and so on, as

shown in Fig. 4B.

In English, similarly, names may be displayed in the display 101 with starting from letter A on the left column, names starting from letter B in the middle column and names starting
5 from letter C in the right column.

A highlight bar 401 inversely displays the highlighted name, with a left column top name initially highlighted, and a telephone number corresponding to the highlighted name is displayed always at the bottom row on screen.

10 Then, when one of the arrow keys 103 is depressed (YES at step S305), the highlight bar 401 moves in a direction of the depressed arrow key 103 (step S306). For example, when the arrow key 103 indicating the down direction is depressed two times, the highlight bar 401 moves to "Itoh" two rows below "Ando" and
15 a telephone number of "Itoh" is displayed at the bottom row as shown in Fig. 4C.

In the case of English names arranged in alphabetical order on screen, for example, Anderson, Ando, Annice, and Arward, "Anderson" is initially highlighted. And when the arrow key 103
20 indicating the down direction is depressed two times, the highlight bar 401 moves to "Annice" two rows below "Anderson" and a telephone number of "Annice" is displayed at the bottom row on screen.

When the highlight bar 401 moves in up, down, left and right
25 directions within the current display area of the display 101 (NO at step S307), only the highlight bar 401 moves according

to operations of the arrow keys 103 (steps S305 to S307).

When the highlight bar 401 moves to the outside of the current display area of the display 101 (YES at step S307), the microprocessor 204 scrolls the display screen of the display 101 so as to display hidden data by the arrow keys 103 (step S308). In this way, the highlight bar moves to the name which is at a location determined by direction and number of depressing of the arrow key 103. For example, when the arrow key 103 of the down direction is depressed by further four times, the display data in the column of names starting from Japanese alphabet 'A' is scrolled down to move the highlight bar 401 from the position of "Itoh" to "Okada", a fourth name below "Itoh", as shown in Fig. 4D. In this embodiment, only the display data of the column in which the highlight bar 401 is located is scrolled, allowing easy operation in case of searching other columns.

On the other hand, when the arrow key 103 of the right direction is depressed three times in the state that the highlight bar 401 is at the initial position, the display data is scrolled in the right direction at the third time of depressing the arrow key, and the highlight bar 401 moves from "Ando" to "Takada", a third name to the right, as shown in Fig. 4E.

After moving the highlight bar 401 to a name to whom a user intends to make a call by operating the arrow keys 103, the user depresses the Enter key 104 surrounded by the arrow keys 103 (YES at step S305). Then, the microprocessor 204 starts a calling operation by using a telephone number corresponding to the

selected name (step S309).

Referring to Fig. 5 and Figs. 6A-6B, when the menu key 105 is depressed in a waiting status (step S302 in Fig. 3), the microprocessor 204 makes a predetermined list of functions displayed in the display 101 (step S501). For example, as shown in Fig. 6A, functions such as "Sound level of incoming call", "Mail setting", etc. are displayed, with the highlight bar 401 at the top initial position.

When any one of the arrow keys 103 is depressed (YES at step S502), the highlight bar 401 moves in the direction of the depressed arrow key 103 (step S503). For example, when the arrow key 103 of the down direction is depressed two times, the highlight bar 401 moves to "Vibrator", two names below "Sound level of incoming call". When the highlight bar 401 moves within the current display area of the display 101 (NO at step S504), only the highlight bar 401 moves according to the depressing of the arrow keys 103 (steps S502 to S504).

When the highlight bar 401 moves to the outside of the current display area of the display 101 (YES at step S504), the microprocessor 204 scrolls the display screen of the display 101 so as to display hidden function items by the arrow keys 103 (step S505). In this way, the highlight bar moves to the function item which is at a location determined by direction and number of depressing of the arrow key 103. For example, when the arrow key 103 of the down direction is depressed by six times, the displayed items are scrolled and the highlight bar 401 moves from

03 3288 3222

"Sound level of incoming call" to "Initial setting", a sixth name below, as shown in Fig. 6B.

After moving the highlight bar 401 to a desired function item by operating the arrow keys 103, a user depresses the Enter
5 key 104 surrounded by the arrow keys 103 (YES at step S502). Then, the microprocessor 204 executes the selected function (step S506).

Referring to Fig. 7, there is shown a second embodiment of the present invention. In the present embodiment, a keypad
10 102 also has a first part and a second part. However, the structure of the first part is different from that of the first embodiment with all the other structural elements being the same as those of the first embodiment and thus their detailed explanation will be omitted with denoted by the same reference
15 numerals.

In the first part of the keypad 102, a stick lever 601 is provided instead of the arrow keys 103. The stick lever 601 is a switch having contacts in four directions of up, down, left and right directions as described in detail later. By inclining
20 the stick lever 601 to a desired direction, the highlight bar 401 can be moved on the display screen in the manner as described above. Further, if the stick lever 601 is structured as a push-button surrounded by the four-direction contact switch, a depression of the stick lever 601 can have the same function as
25 the depression of the Enter key 104 for executing a selected name, with improved operation of the keypad.

FQ5-348

14

The shape of the stick lever 601 may be determined by considering easy of use. If the stick lever 601 is button-shaped as shown in Fig. 7, a user can perform the selection and entering operation by just placing a thumb, for example, on the upper surface of the stick lever 601. The stick lever 601 is inclined to a desired direction to move the highlight bar 401, and, when reaching a desired name of a person to communicate with or a desired menu item, the stick lever 601 is depressed with the thumb to execute the desired operation.

Referring to Fig. 8A, a substrate 602 has a plurality of contacts 603 formed thereon and covered with a metal dome 604. None of the contacts 603 normally makes contact with the metal dome 604. An actuator 605 is placed on the top of the metal dome 604 within a housing 606 and is coupled with the stick lever 601 through an opening 607 formed in the top of the housing 606.

As shown in Fig. 8B, five contacts 701-705 are arranged on the substrate 602. The center contact 701 is surrounded by other contacts 702-705, which are spaced uniformly. In this case, the respective contacts 702, 703, 704 and 705 correspond to up, down, left and right directions. The center contact 701 is provided for Enter operation.

When the stick lever 601 is inclined in the up direction, the corresponding edge of the actuator 605 presses down the metal dome 604 to put the metal dome 604 into contact with only the contact 702. This causes the highlight bar 401 to move in the up direction. It is the same with other contacts 703-705. When

reaching a desired name of a person to communicate with or a
desired menu item, the stick lever 601 is depressed with the thumb.
This causes the metal dome 604 to be pressed down at the center
thereof to put it into contact with the center contact 701 and
5 thereby the desired operation is executed.

In this manner, it is possible to achieve equivalent
functions of the arrow keys 103 and the Enter key 104 with only
one stick lever 601. Therefore, such a control switch like a
joystick contributes to improved operability and reduced size
10 of the telephone.

As described above, according to the present invention,
since the arrow keys and the Enter key are disposed close to each
other almost in one integration, it becomes possible to select
and input necessary display information with minimum move of a
15 finger. Therefore, selection of a desired one from a plurality
of display information items can be facilitated extremely without
involving a trouble of finding keys. Similarly, selection of
a desired one from various displayed functions can be facilitated.
The information entering is performed with a mere depressing of
20 the Enter key disposed closely. Thus, according to the present
invention, it becomes possible to improve substantially the
operability of a portable communication apparatus.

Furthermore, according to the present invention, since it
is also possible to achieve equivalent functions of the arrow
25 keys and the Enter key with only one stick lever, the stick lever
can contribute to further improve the operability and reduce the

FQ5-348

16

size of a portable communication apparatus.

03 3288 3222

FQ5-348

17

WHAT IS CLAIMED IS:

1. A portable communication apparatus having a display and a keypad on a main side of a housing thereof,

wherein the keypad includes a key section comprising at least one key which is used to select a desired information item from a plurality of information items displayed in the display and then to execute a selected information item.

2. The portable communication apparatus according to claim 1, wherein the key section comprises:

a plurality of movement operation keys for instructing a search direction to select the desired information item from the information items displayed in the display; and an execution key disposed at a position sandwiched by the plurality of movement operation keys, for executing the selected information item.

3. The portable communication apparatus according to claim 2, wherein the key section consisting of the movement operation keys and the execution key is disposed with a space from other operation keys of the keypad.

4. The portable communication apparatus according to

claim 1, wherein the key section consists of a joystick-type key, which is inclined in a desired search direction to select the desired information item and is depressed to execute the desired information item.

5 5. The portable communication apparatus according to claim 4, wherein the key section is disposed with a space from other operation keys of the keypad.

6. A portable communication apparatus having a display and a keypad on a main side of a housing thereof, the keypad
10 comprising two key sections which are separately provided on the main side,

 wherein a predetermined one of the two key sections comprises a plurality of key contacts which are used to select a desired information item from a plurality of information items
15 displayed in the display and then to execute a selected information item.

7. The portable communication apparatus according to claim 6, wherein the key contacts are a plurality of movement operation key contacts and an execution key contact surrounded
20 by the movement operation key contacts.

8. The portable communication apparatus according to claim 7, wherein the predetermined key section comprises:

a plurality of arrow keys corresponding to the movement operation key contacts, respectively, for instructing a search direction to select the desired information item from the information items displayed in the display; and

5 an execution key disposed at a position sandwiched
by the plurality of movement operation keys and corresponding
to the execution key contact, for executing the selected
information item.

9. The portable communication apparatus according to claim 7, wherein the predetermined key section comprises a joystick-type key, which is inclined in a desired search direction to turn on a movement operation key contact corresponding to the desired search direction and is depressed to turn on the execution key contact.

15 10. A portable communication apparatus having a display
and a keypad on a main side of a housing thereof,

the keypad comprising a first key section and a second key section which are separately provided on the main side, wherein

20 the first key section comprises a plurality of key contacts
which are used to select a desired information item from a
plurality of information items displayed in the display and then
to execute a selected information item; and

the second key section comprises a ten-key pad,

FQ5-348

20

the portable communication apparatus further comprising:

a memory for storing a plurality of names and destination addresses corresponding to the names; and

5 a controller for selecting a desired name and a destination address corresponding to the desired name and executing a calling operation according to the destination address of the desired name according to a series of operations of the first key section.

10 11. The portable communication apparatus according to claim 10, wherein the key contacts are a plurality of movement operation key contacts and an execution key contact surrounded by the movement operation key contacts.

15 12. The portable communication apparatus according to claim 11, wherein the first key section comprises:

a plurality of arrow keys corresponding to the movement operation key contacts, respectively, for instructing a search direction to select the desired information item from the information items displayed in the display; and

20 an execution key disposed at a position sandwiched by the plurality of movement operation keys and corresponding to the execution key contact, for executing the selected information item.

FQ5-348

21

13. The portable communication apparatus according to claim 11, wherein the first key section comprises a joystick-type key, which is inclined in a desired search direction to turn on a movement operation key contact corresponding to the desired
5 search direction and is depressed to turn on the execution key contact.

003 3200 3222

FQ5-348

1/8

FIG. 1

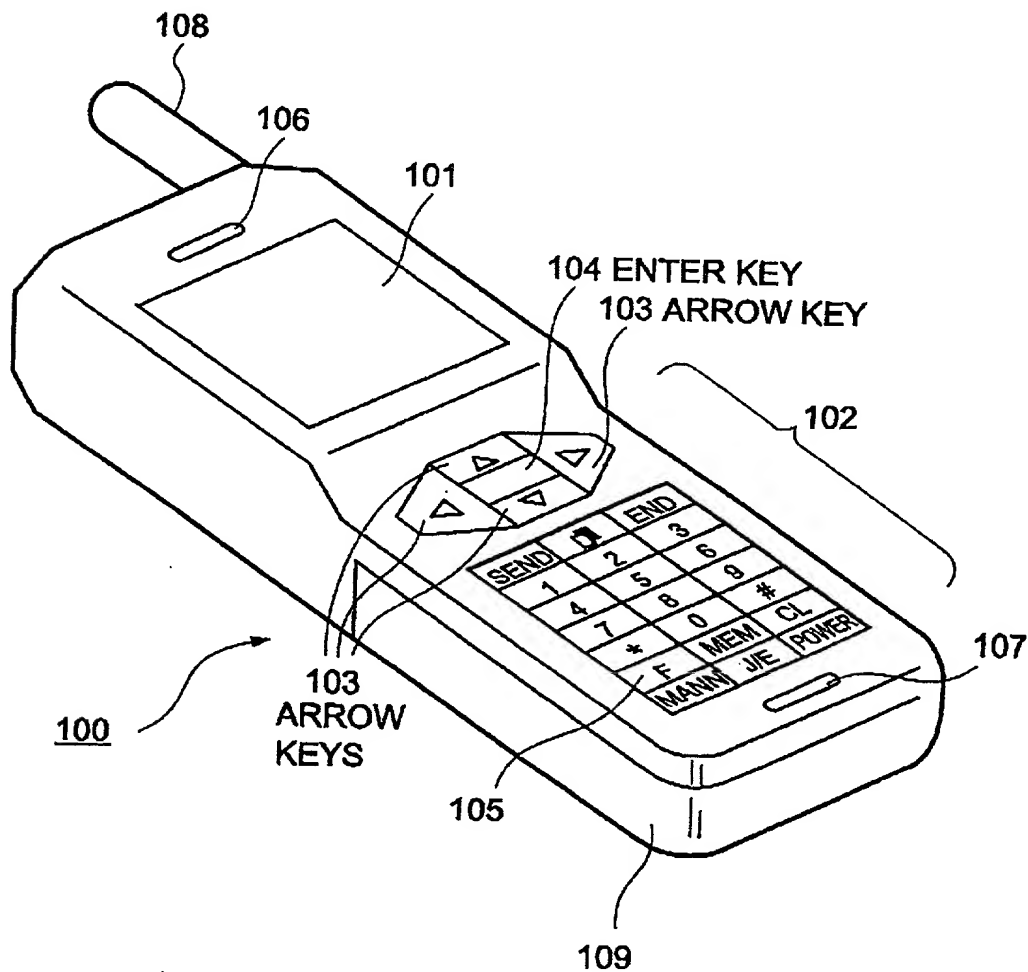


FIG.2


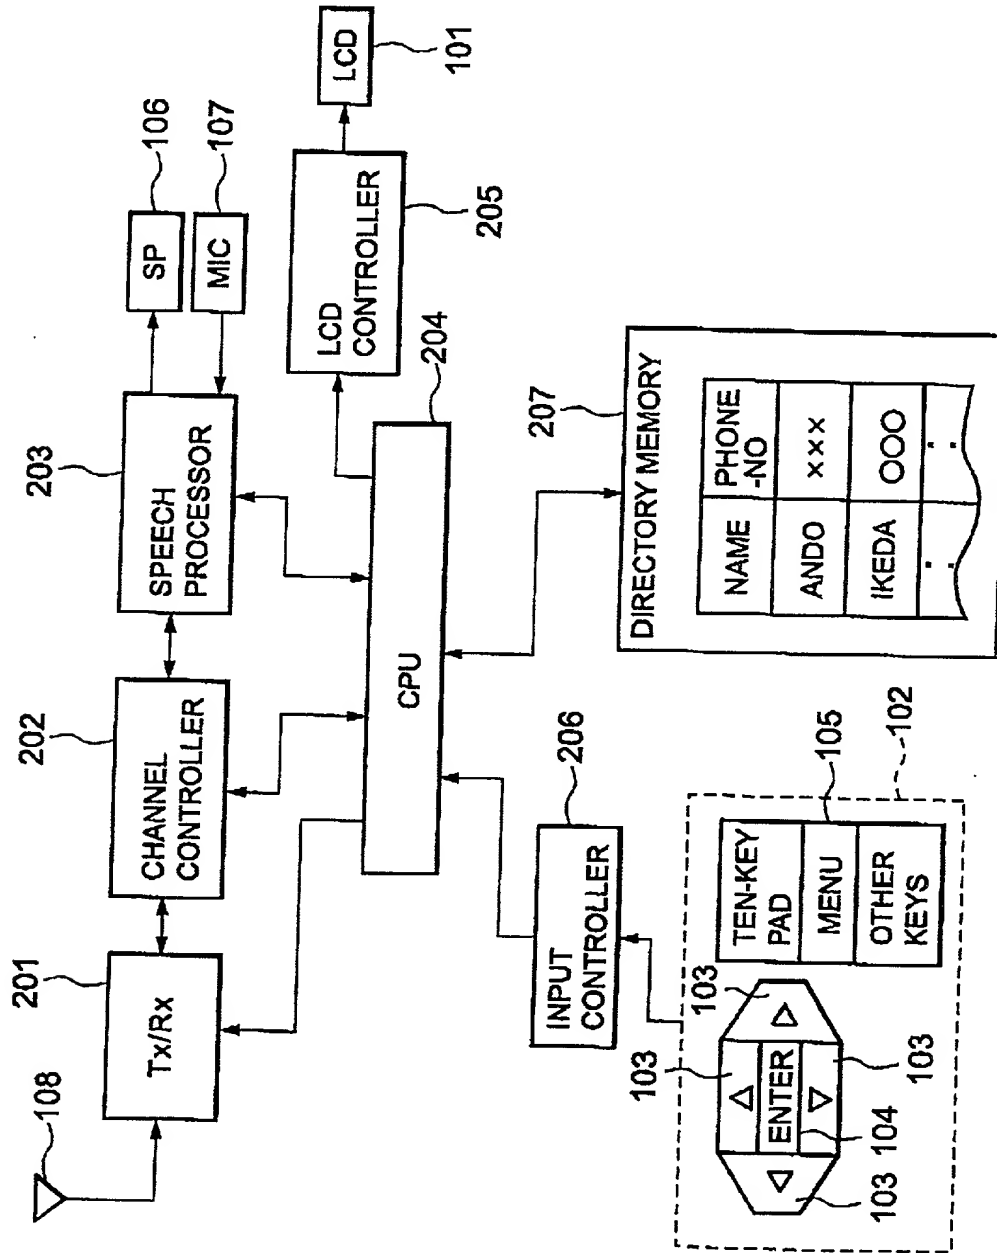


FIG.3

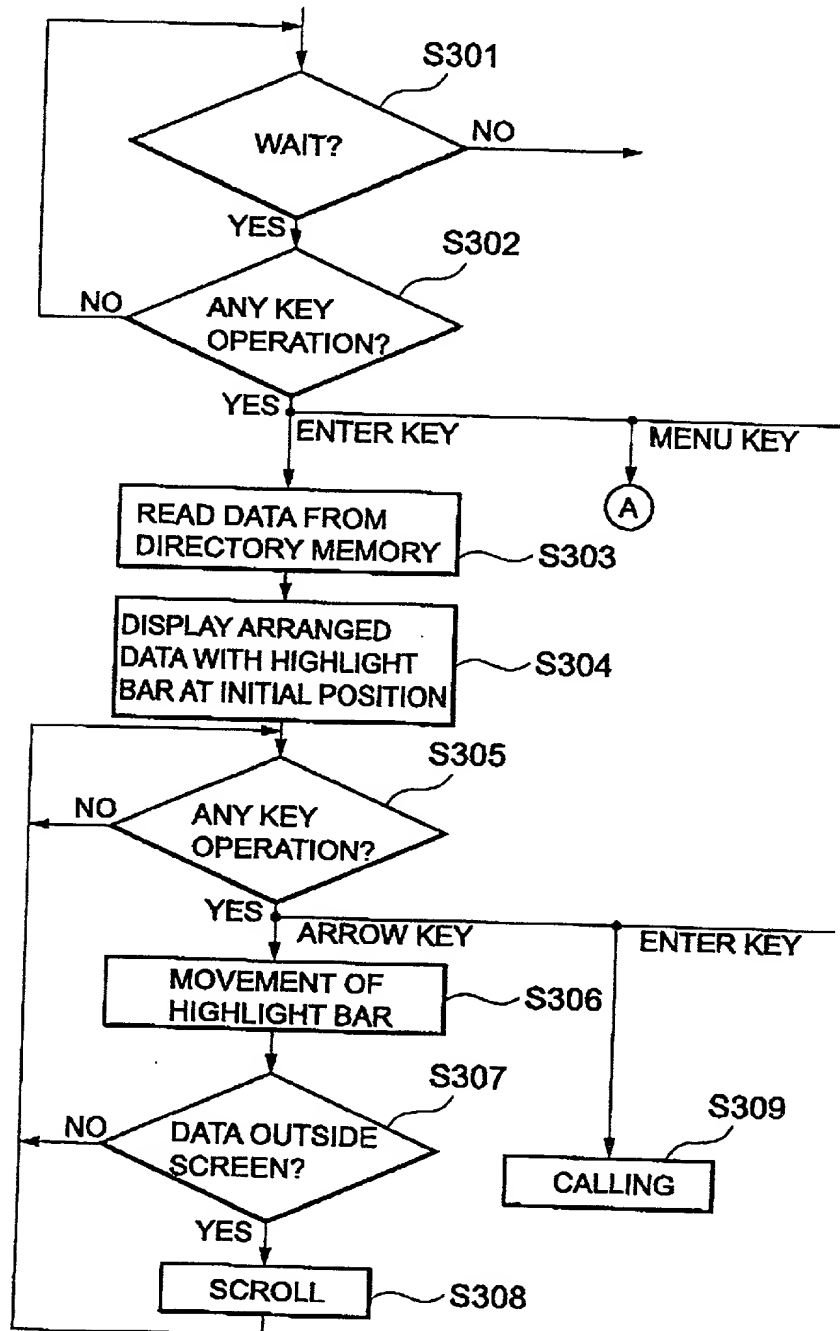

FQ5-348

4/8

FIG.4A

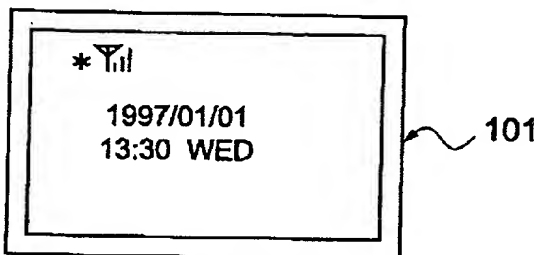


FIG.4B

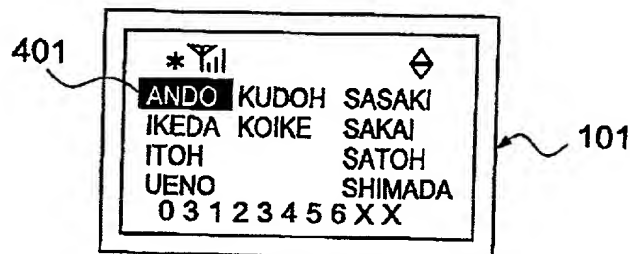


FIG.4C



FIG.4D


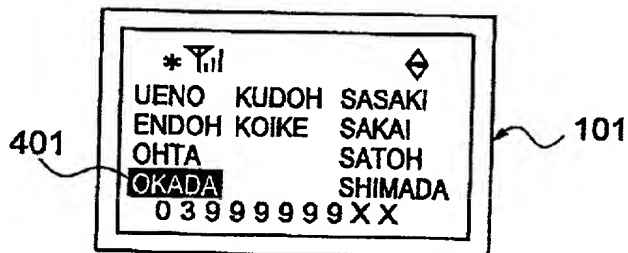


FIG.4E

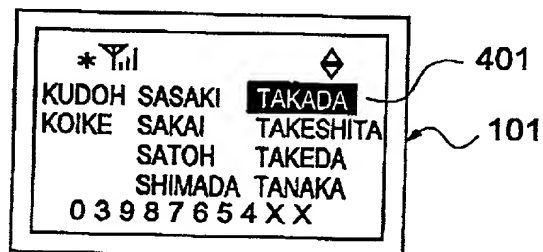

0028/0034

FIG.5

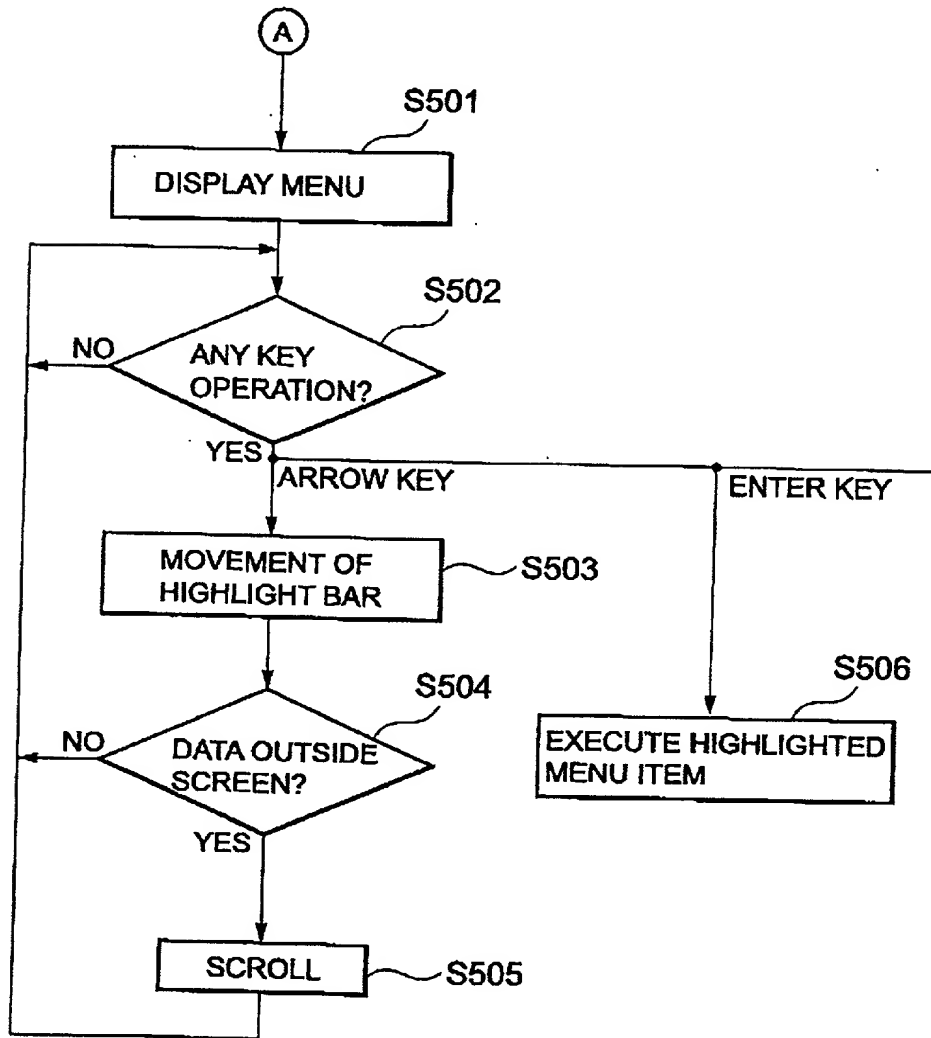


FIG.6A


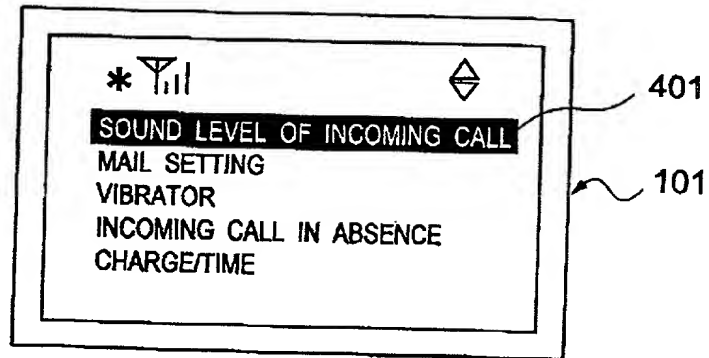


FIG.6B

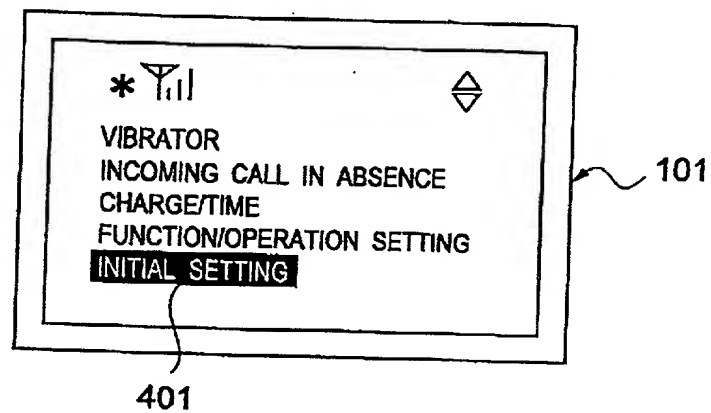

FQ5-348

7/8

FIG.7

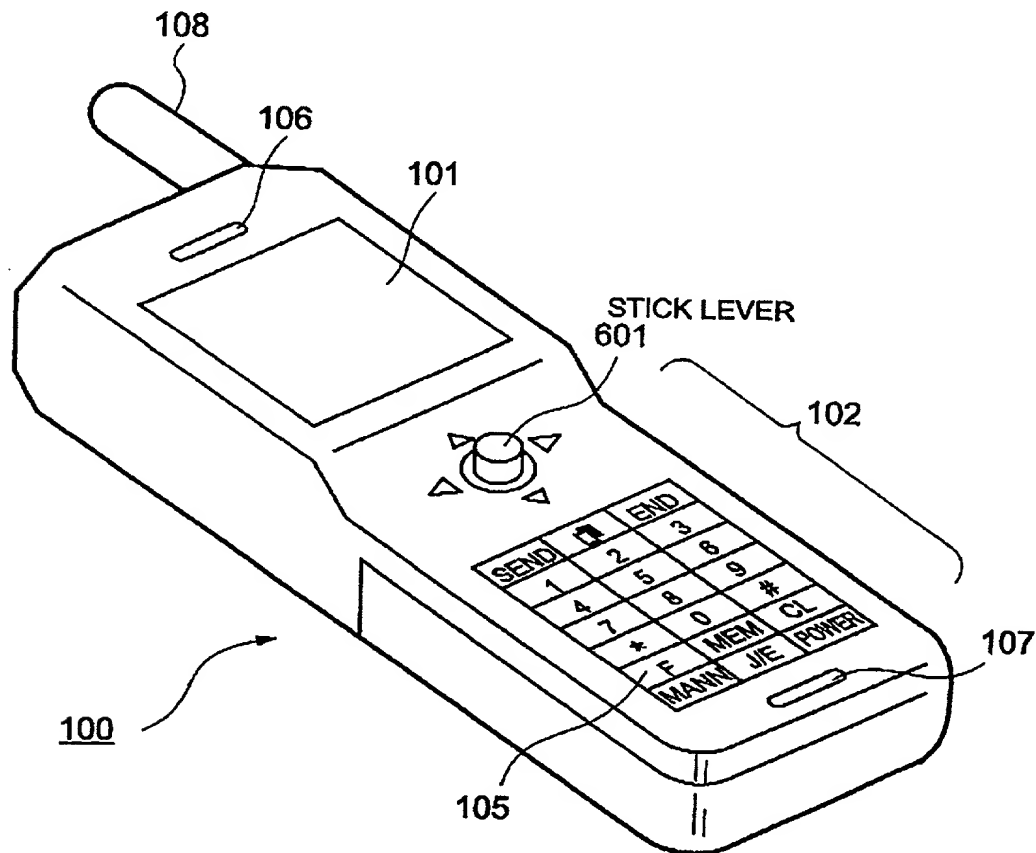


FIG.8A


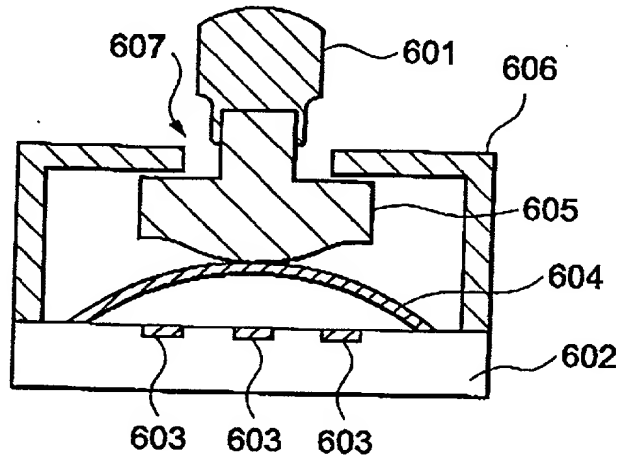


FIG.8B

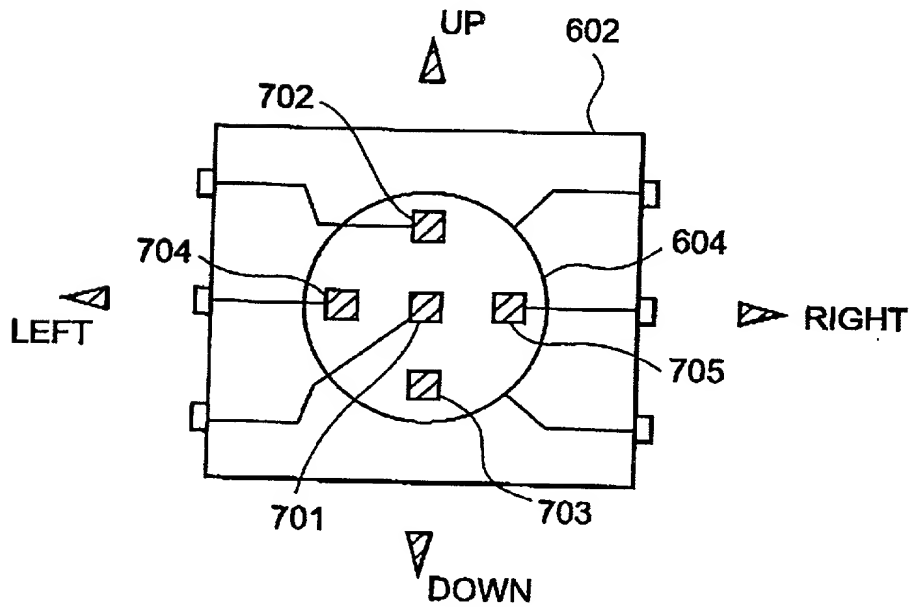

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name: that I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought in the application entitled:

PORTABLE COMMUNICATION APPARATUS

which application is:

☒ the attached application
(for original application)

☐ application Serial No. _____
filed _____, and amended on _____

(for declaration not accompanying application)

that I have reviewed and understand the contents of the specification of the above-identified application, including the claims, as amended by any amendment referred to above: that I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application under 37 C.F.R. 1.56(a), i.e. such information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent: that I hereby claim foreign priority benefits under Title 35, United States Code §119, §172 or §365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified on said list any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:


Application Number	Country	Filing Date	Priority Claimed (yes or no)
332417/ 1997	Japan	November 17, 1997	YES

I hereby claim the benefit of Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in a listed prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge my duty to disclose any material information under 37 C.F.R. 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
------------------------	-------------	--

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorrow, Reg. No. 19,093; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484 and Mark Boland, Reg. No. 32,179, my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to SUGHRUE, MION, ZINN, MACPEAK & SEAS, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date November 13, 1998 First Inventor MANABU DEGUCHI
First Name Middle Initial Last Name
Residence Tokyo, Japan Signature manabu deguchi 
Post Office Address NEC Corporation, 7-1, Shiba 5-chome,
Minato-ku, Tokyo, Japan
Citizenship Japanese

Date _____ Second Inventor _____
First Name Middle Initial Last Name
Residence _____ Signature _____
Post Office Address _____
Citizenship _____